ROTARY TILLER

MINI



Power Required	Working Width	Hitch Type	Gear Box	Working Depth	Number of Blade
15 – 40 hp	800 - 1800 mm	CAT-I	Single & Multi Speed	Up to 125 mm	16/24 - 54 (L/C, Single/Multi)

ROTARY TILLER

Mini

The Landforce Rotary Tiller (Mini) is a compact agricultural tool designed for small-land. It features rotating blades that efficiently loosen and aerate the soil for better seed-bed preparation. Ideal for small farms and orchards, it is easy to maneuver and highly effective in various soil types.



Cat-I linkage is designed for 15–35 HP compact tractors.



Specially designed blades for optimum fuel consumption and efficient tilling




Available with both Single-speed and multi-speed gearboxes to suit different soil and working conditions.



Adjustable skid shoes control depth with various settings



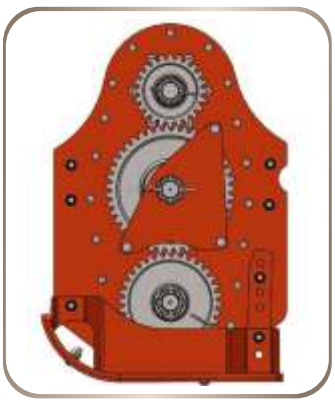

GEAR DRIVE

TECHNICAL SPECIFICATIONS

MODEL	Unit	LFRTM80	LFRTM100	LFRTM120	LFRTM140	LFRTM160	LFRTM180	LFRTM100	LFRTM120	LFRTM140	LFRTM160	LFRTM180
Gear Box		Single Speed						Multi Speed				
Side Transmission		Gear Drive										
Length	mm	740										
Width	mm	1000	1200	1400	1600	1800	2000	1200	1400	1600	1800	2000
Height	mm	912										
Working Width	mm	800	1000	1200	1400	1600	1800	1000	1200	1400	1600	1800
Min. Tractor (Hp Required)	hp	15-20	20-25	25-30	30-35	30-35	35-40	20-25	25-30	30-35	30-35	35-40
Weight (w/o PTO)	kg	195	215	230	250	275	305	225	245	265	290	315
Working Depth	mm	Upto 125 mm										
Depth Control		Skids fitted as per standard equipment										
PTO Speed	rpm	540										
Rotor Speed	rpm	210						180-240				
Number of Blades (L/C)	No.	16/24	20/30	24/36	42	48	54	20/30	24/30/36	42	48	54
Hitch type		CAT- I										
Driveline safety device		Shear Bolt /Slip Clutch										
On Request		CE Protection Guard										

Company reserves the rights to change/amend products specifications without any prior notice.